JOCMA28D-SS4

Rev.A.1.0

DESCRIPTION:

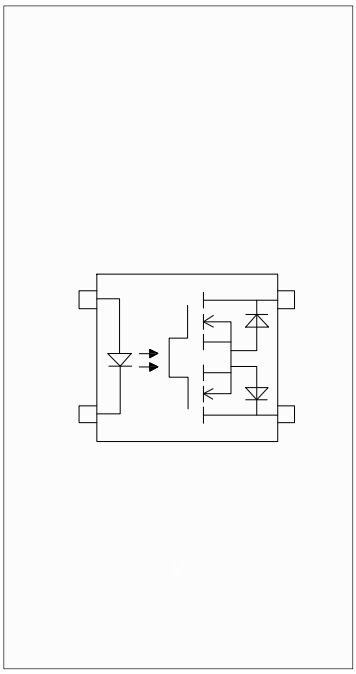

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Value	Unit

NOTE1: 100μs pulse, 100Hzfrequency
NOTE2: AC for 1minute, R.H.=40~60%

ELECTRICAL CHARACTERISTICS

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit

Recommended Operating Conditions

Characteristics	Symbol	Min.	Typ.	Max.	Unit

ORDERING INFORMATION

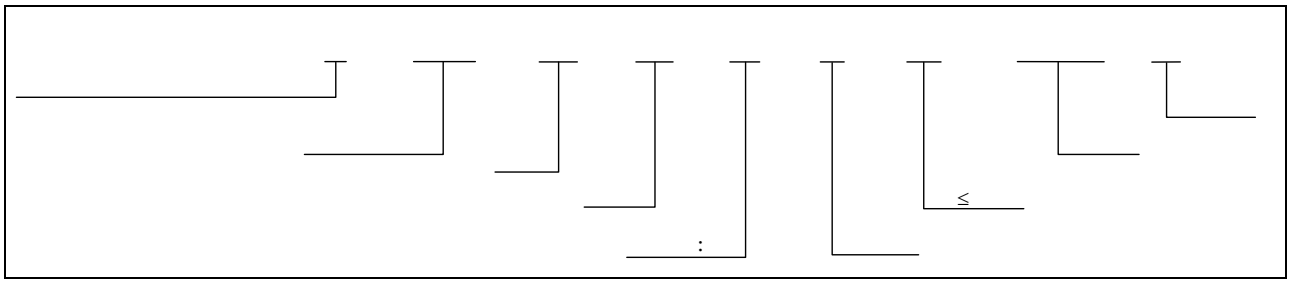

Packing Quantity	
Option	**Quantity**
SSON4	2500 Units/Reel

Characteristics Curves

FIG.1:

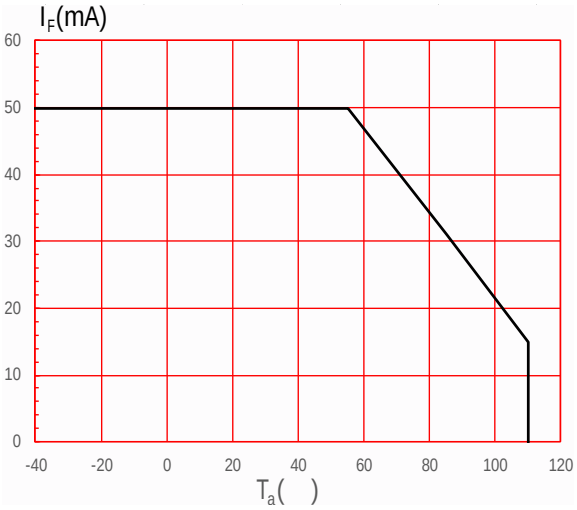

FIG.2:

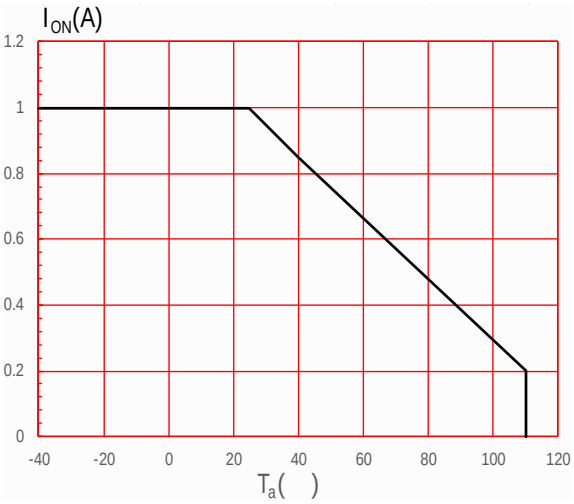

FIG.3:

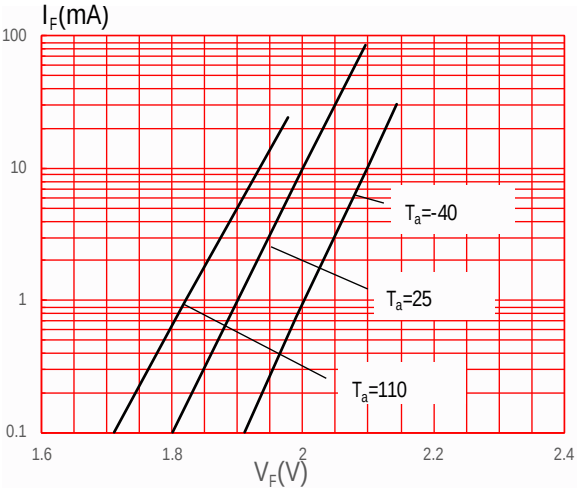

FIG.4:

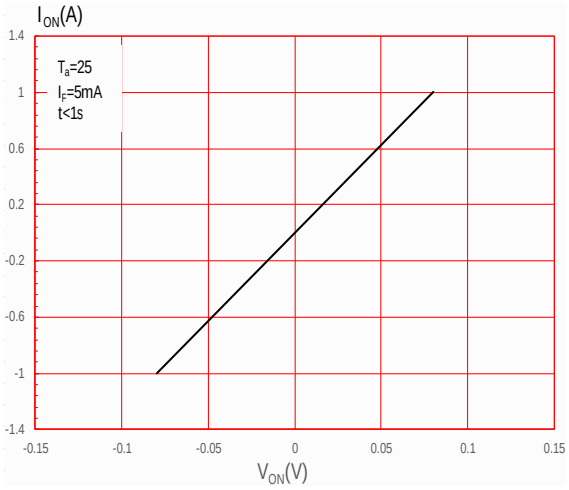

FIG.5:

FIG.6:

Package Dimension (Unit: mm)

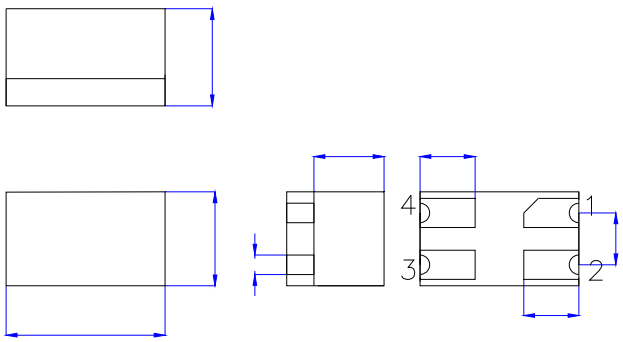

RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

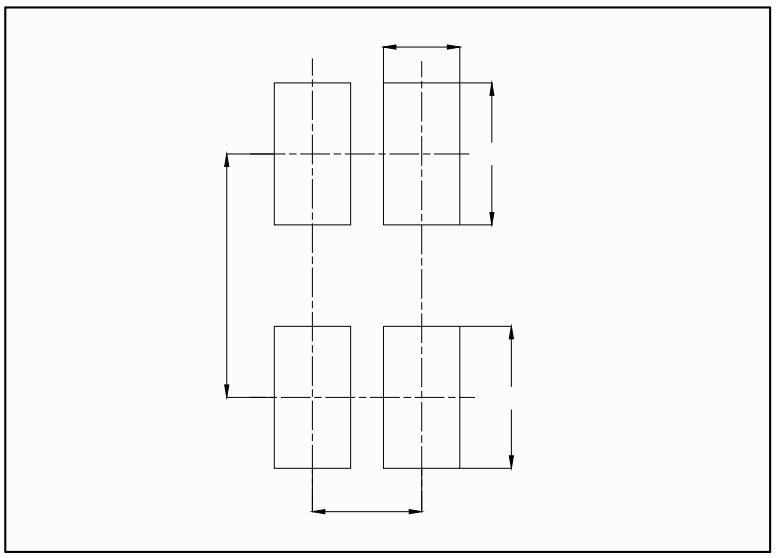

CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

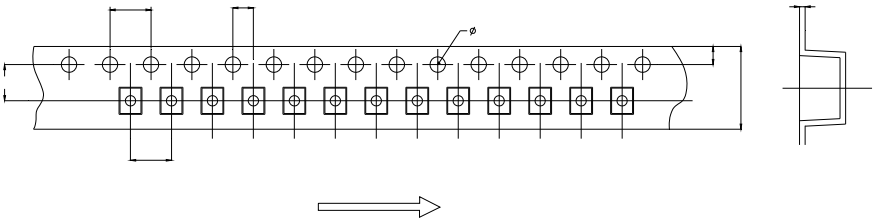

REFLOW INFORMATION

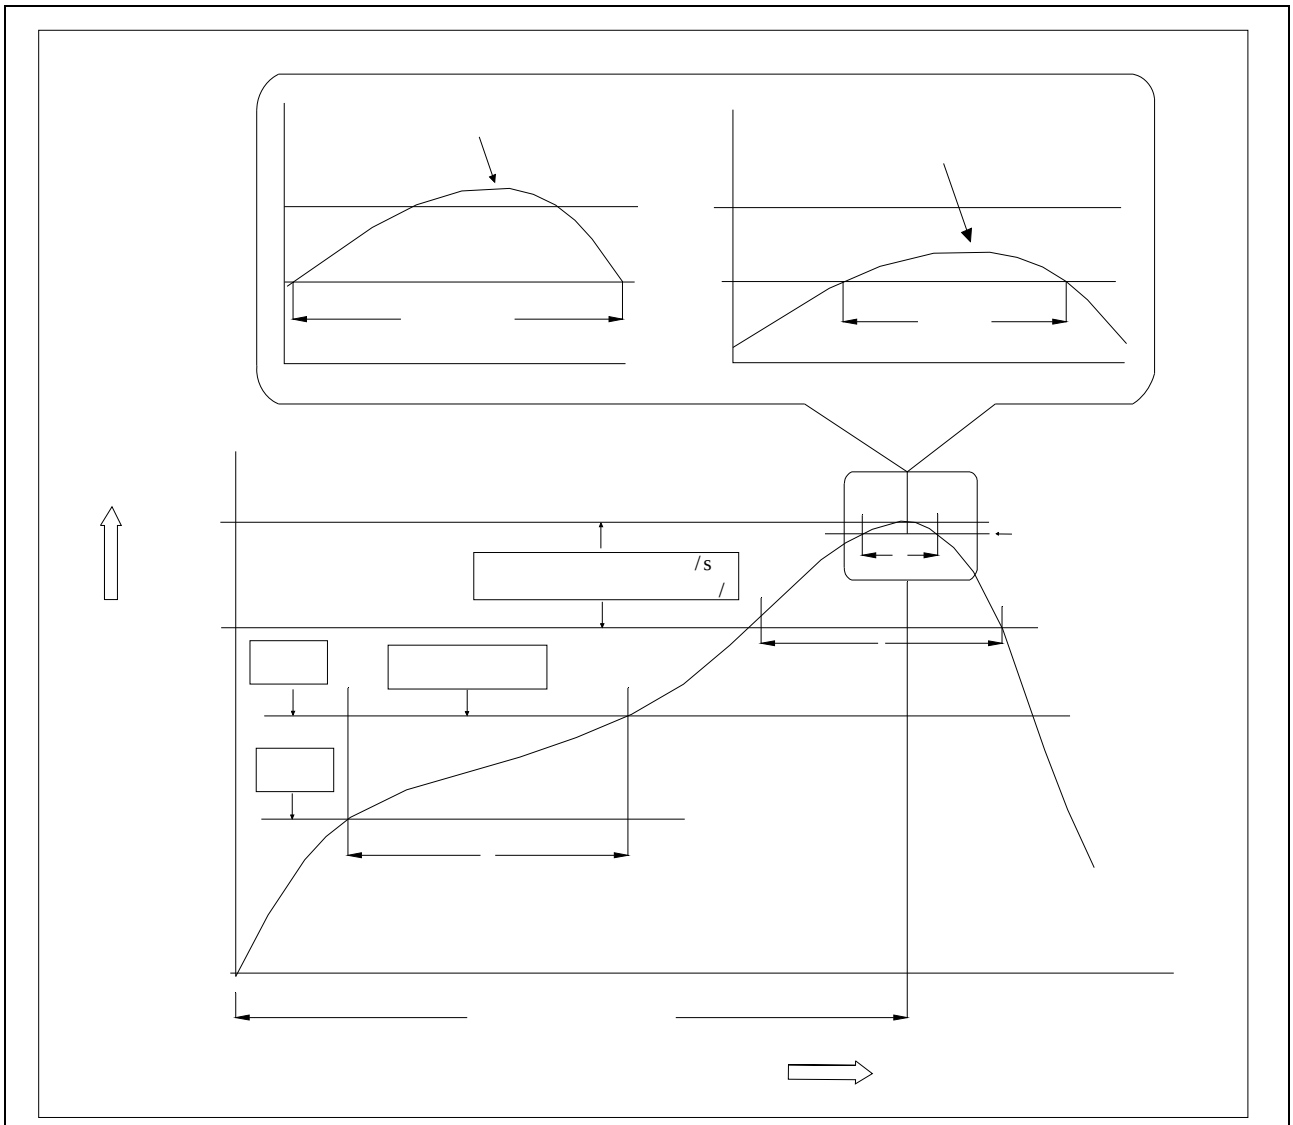

Profile Feature	Sn-Pb Assembly Profile	Pb-Free Assembly Profile