



DESCRIPTION:

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS




NOTE1: 100μs pulse, 100Hz frequency

NOTE2: AC for 1minute, R.H.=40~60%

ELECTRICAL CHARACTERISTICS




ORDERING INFORMATION

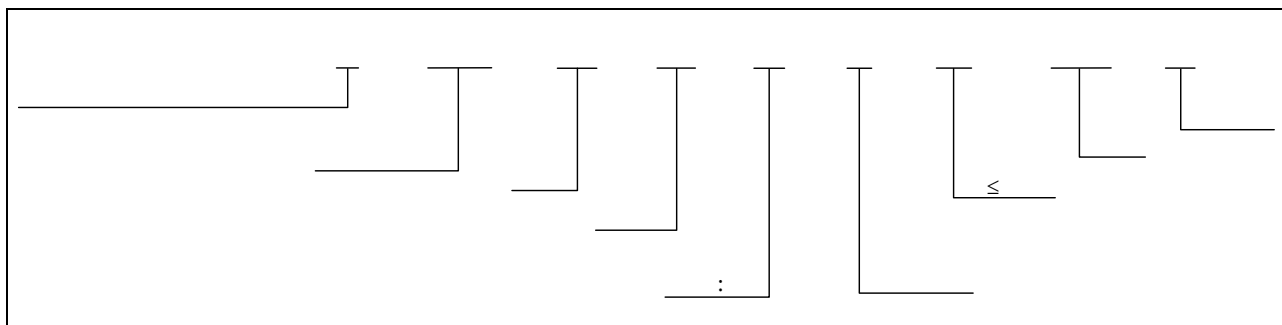

Packing Quantity






Option	Quantity	Quantity – Inner box	Quantity –Outer box
SOP4	3000 Units/Reel	2 Reels/Inner box	5 Inner box/Outer box =30k Units







MARKING

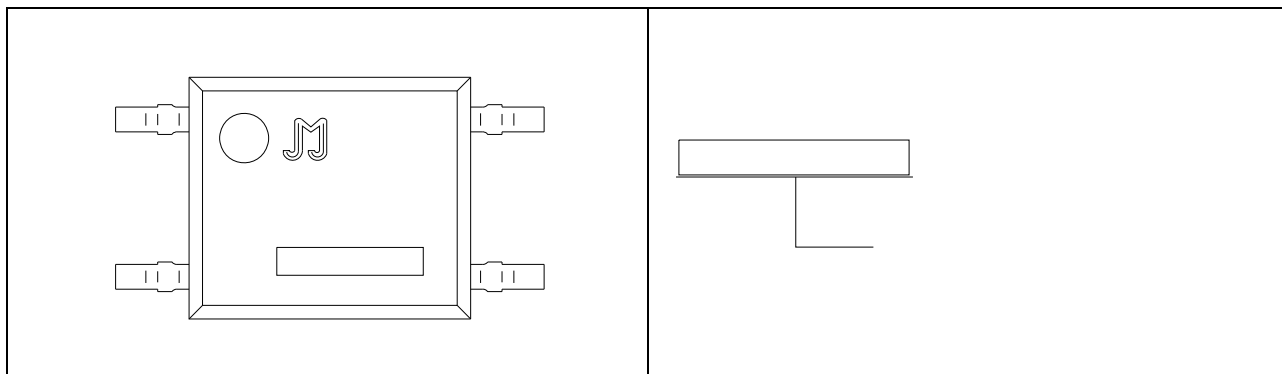




Characteristics Curves

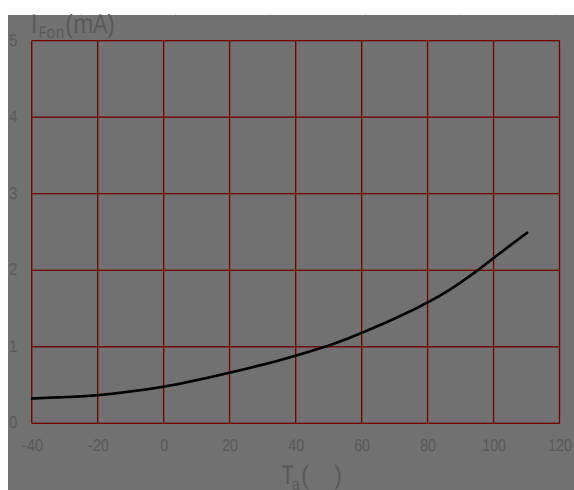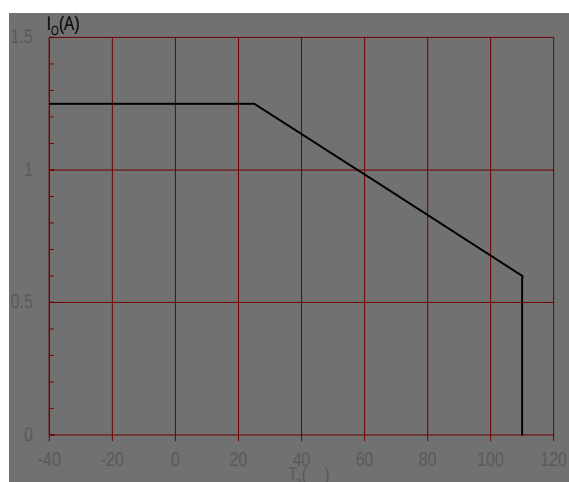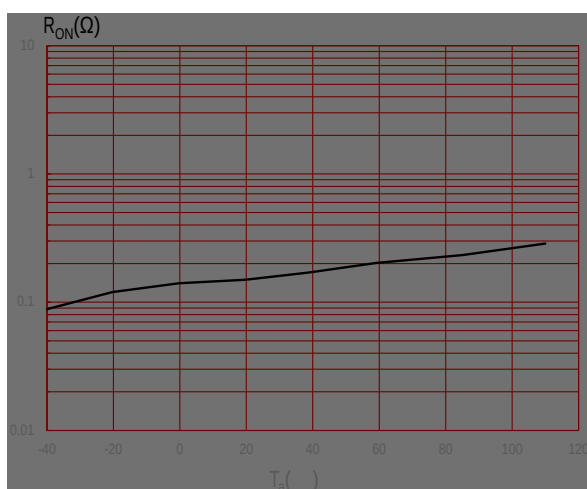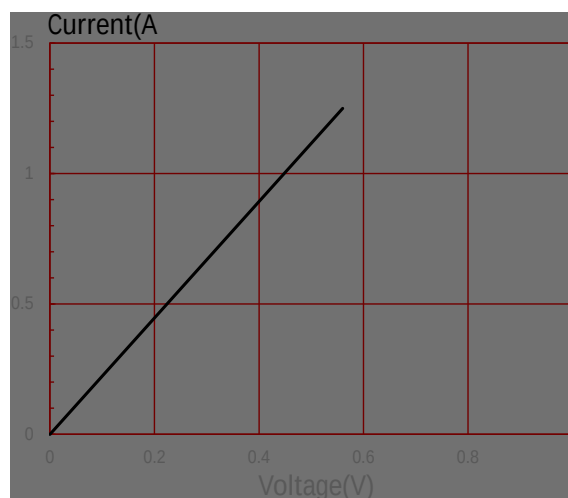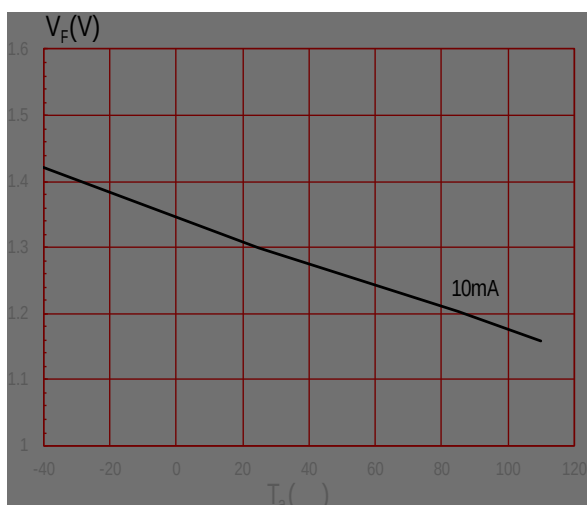

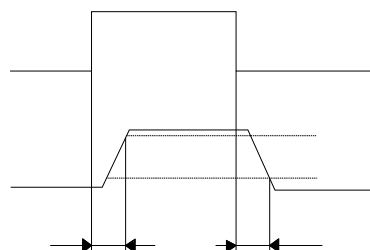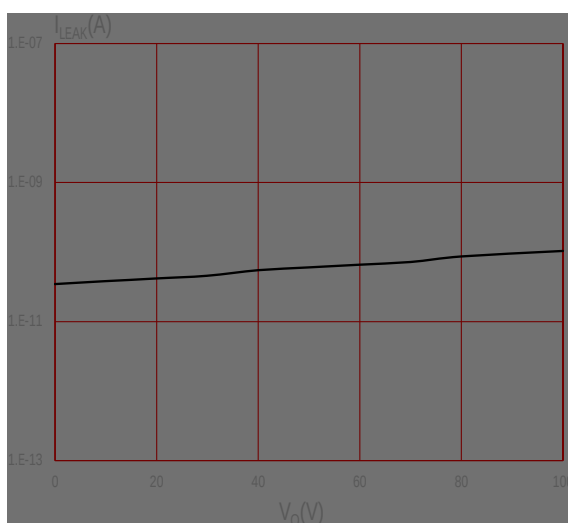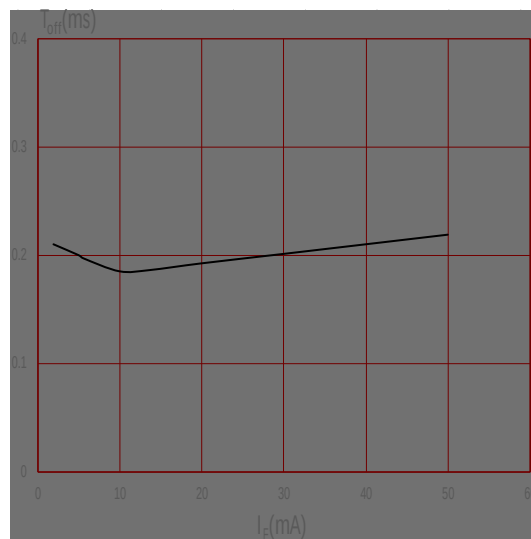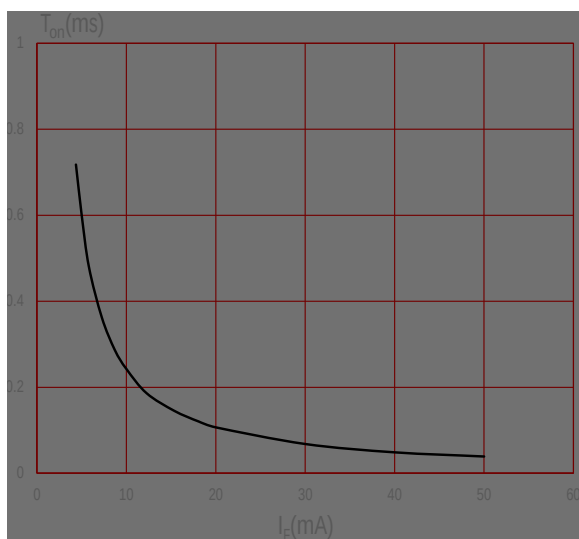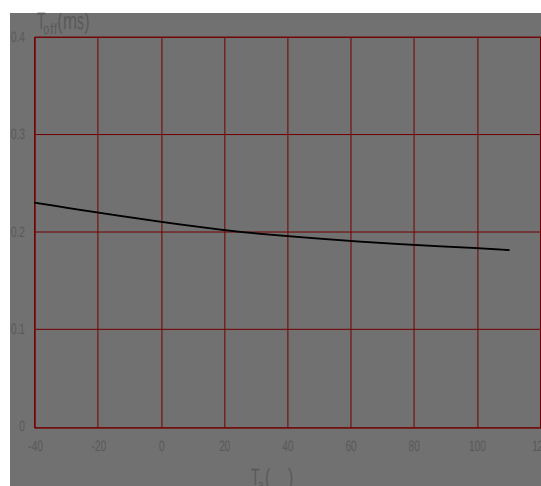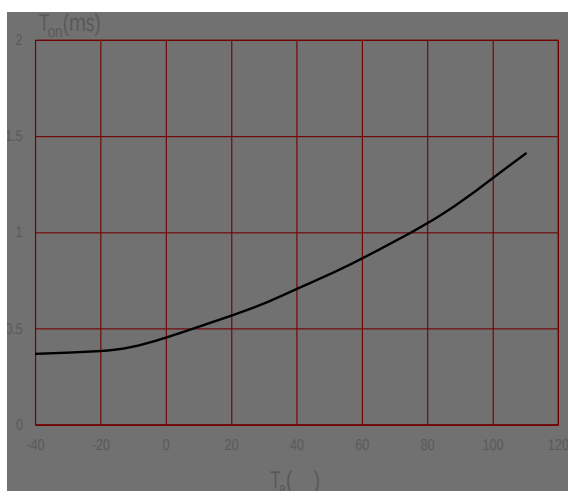



CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

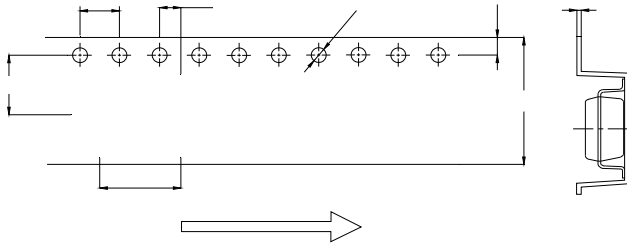



REFLOW INFORMATION

