



DESCRIPTION:

MAIN FEATURES



ABSOLUTE MAXIMUM RATINGS

				①	



				②	
					℃
					℃
					℃
					℃


NOTE1: 100μs pulse, 100Hz frequency




NOTE2: AC for 1minute, R.H.=40~60%

ELECTRICAL CHARACTERISTICS









ORDERING INFORMATION

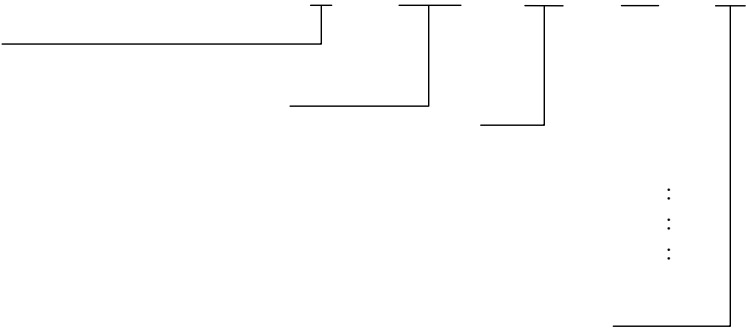

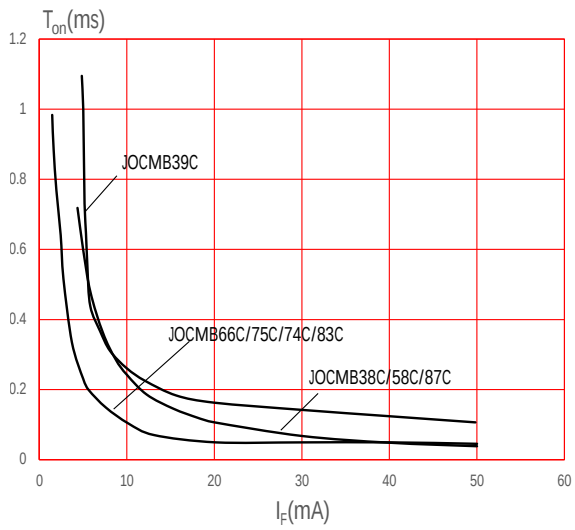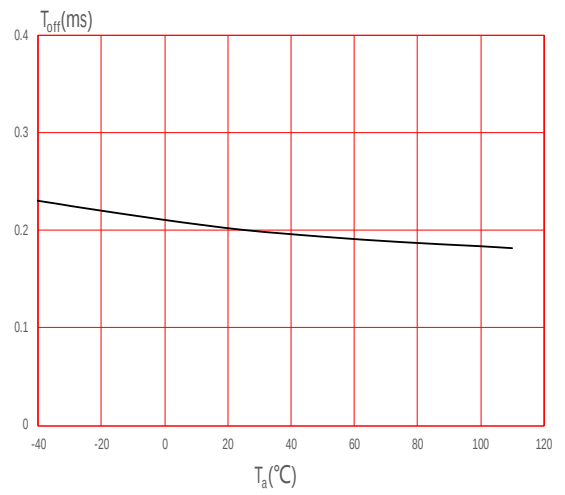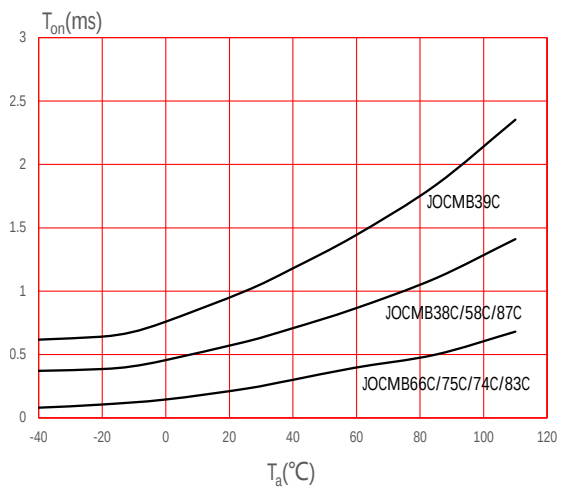


Package Dimension (Unit: mm)


[illegible][illegible]



RECOMMENDED SOLDER MASK (Dimensions in mm unless otherwise stated)

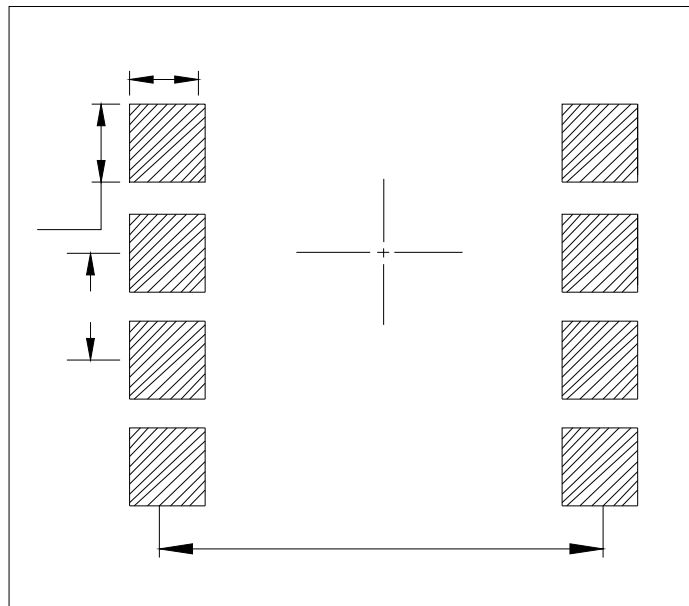

TUBE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

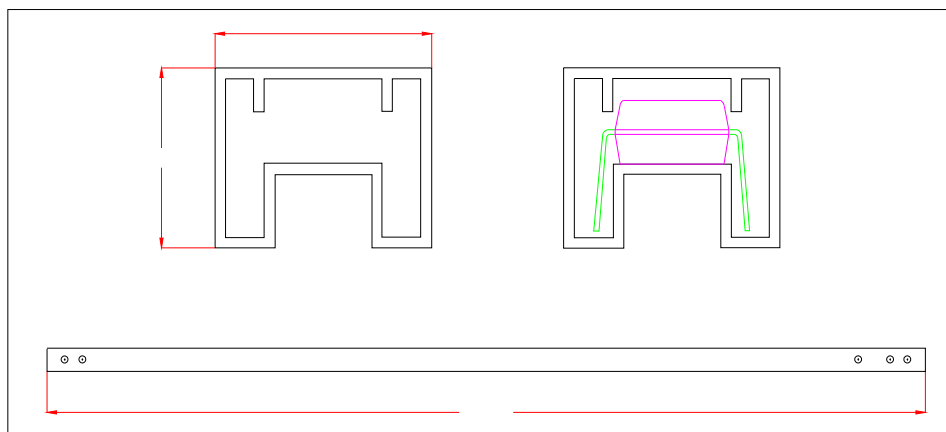




CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)




REFLOW INFORMATION

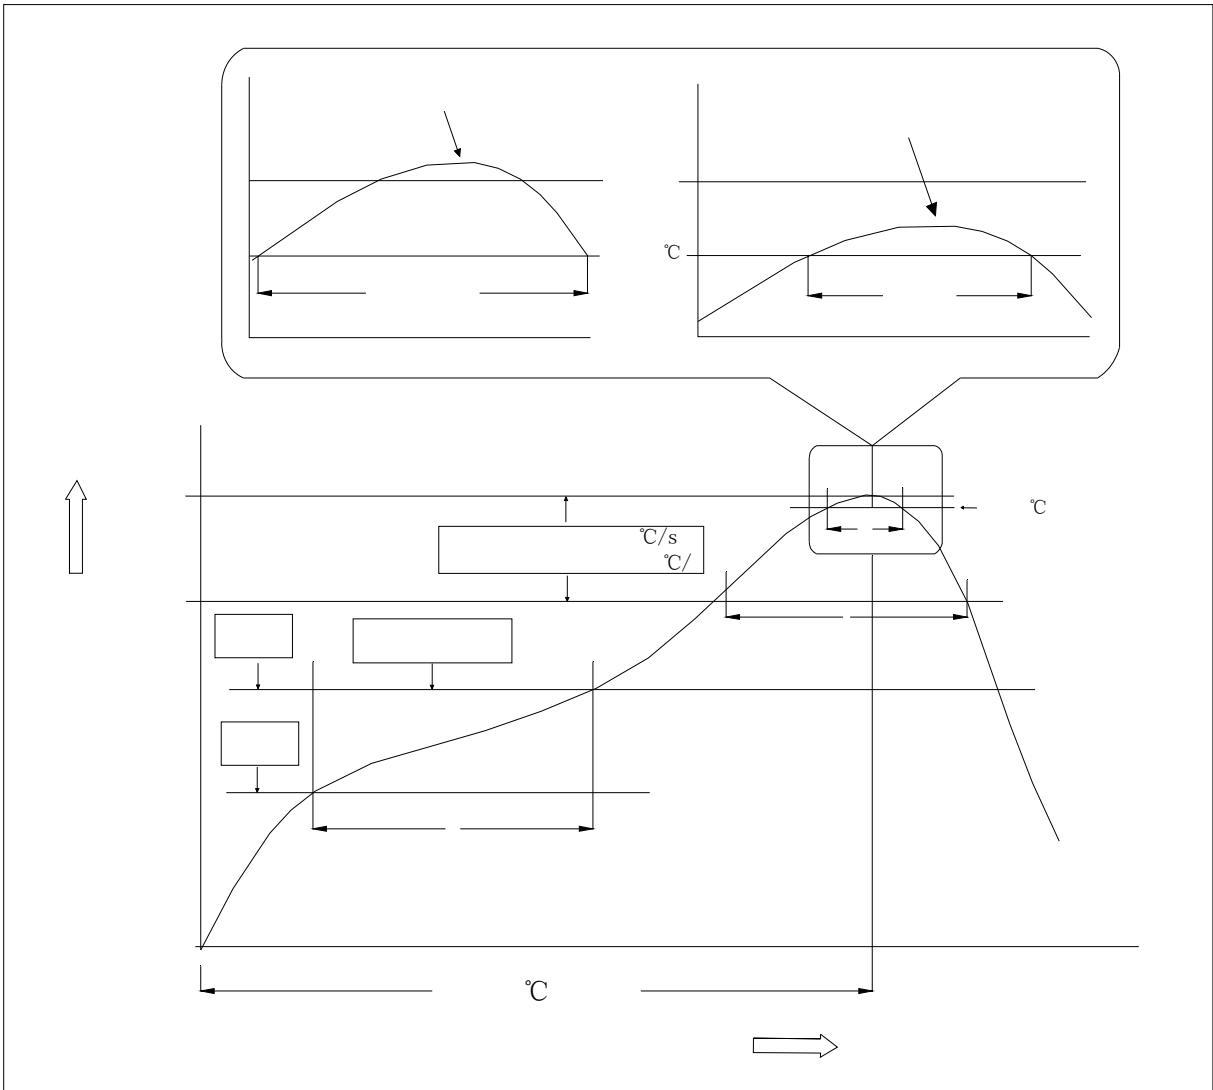

	°C	°C
	°C	°C
	°C	°C
	°C	°C
	°C °C °C	°C °C °C
°C °C		
	°C	°C
°C		



WAVE SOLDERING

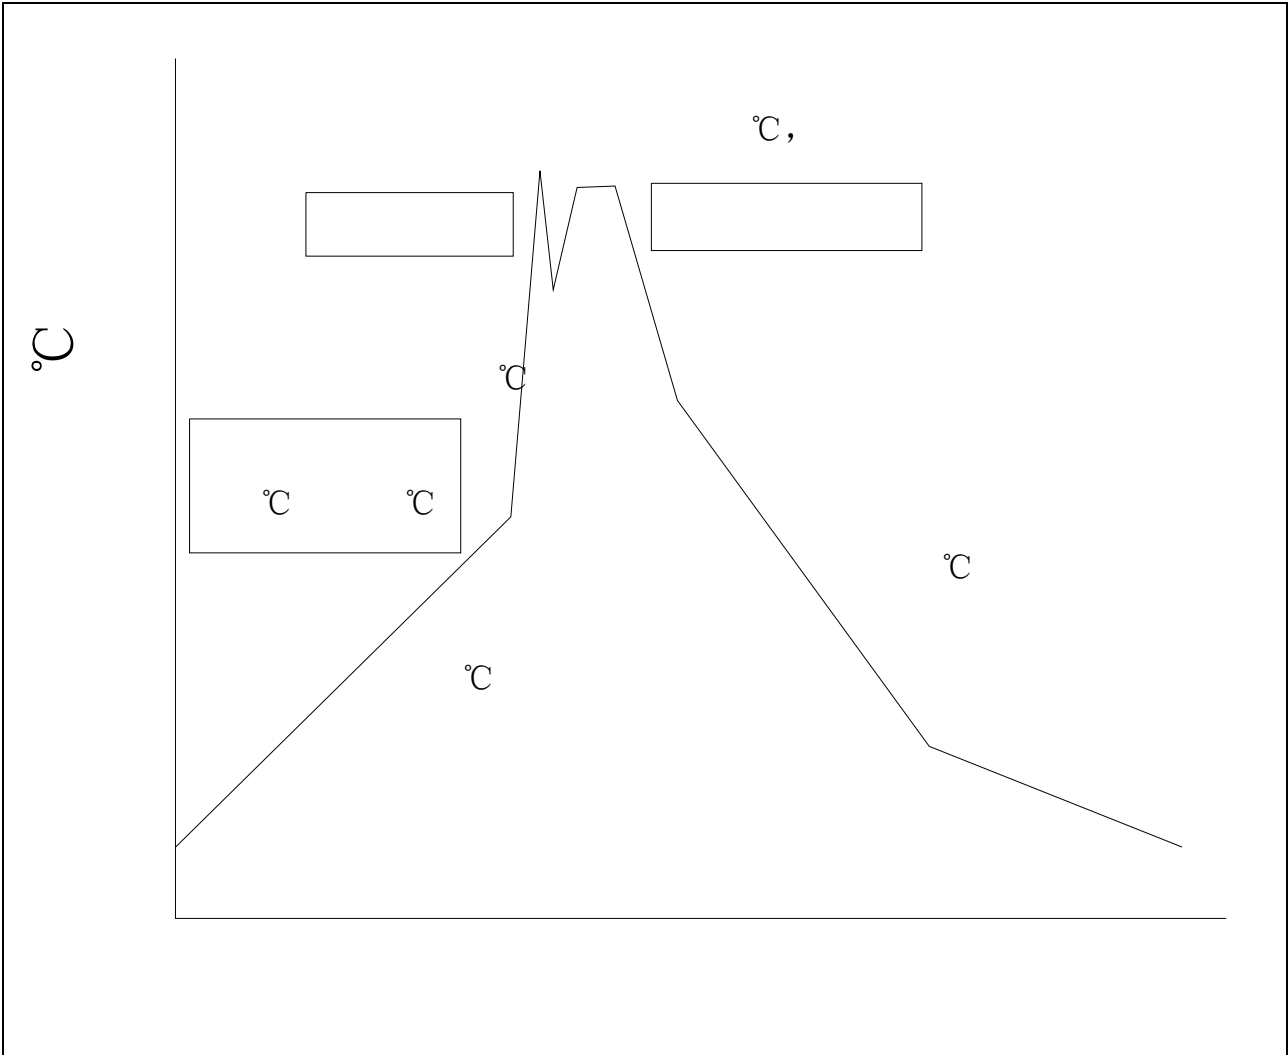

HAND SOLDERING BY SOLDERING IRON	
	± °C

